


AMPLIFIER KEYS

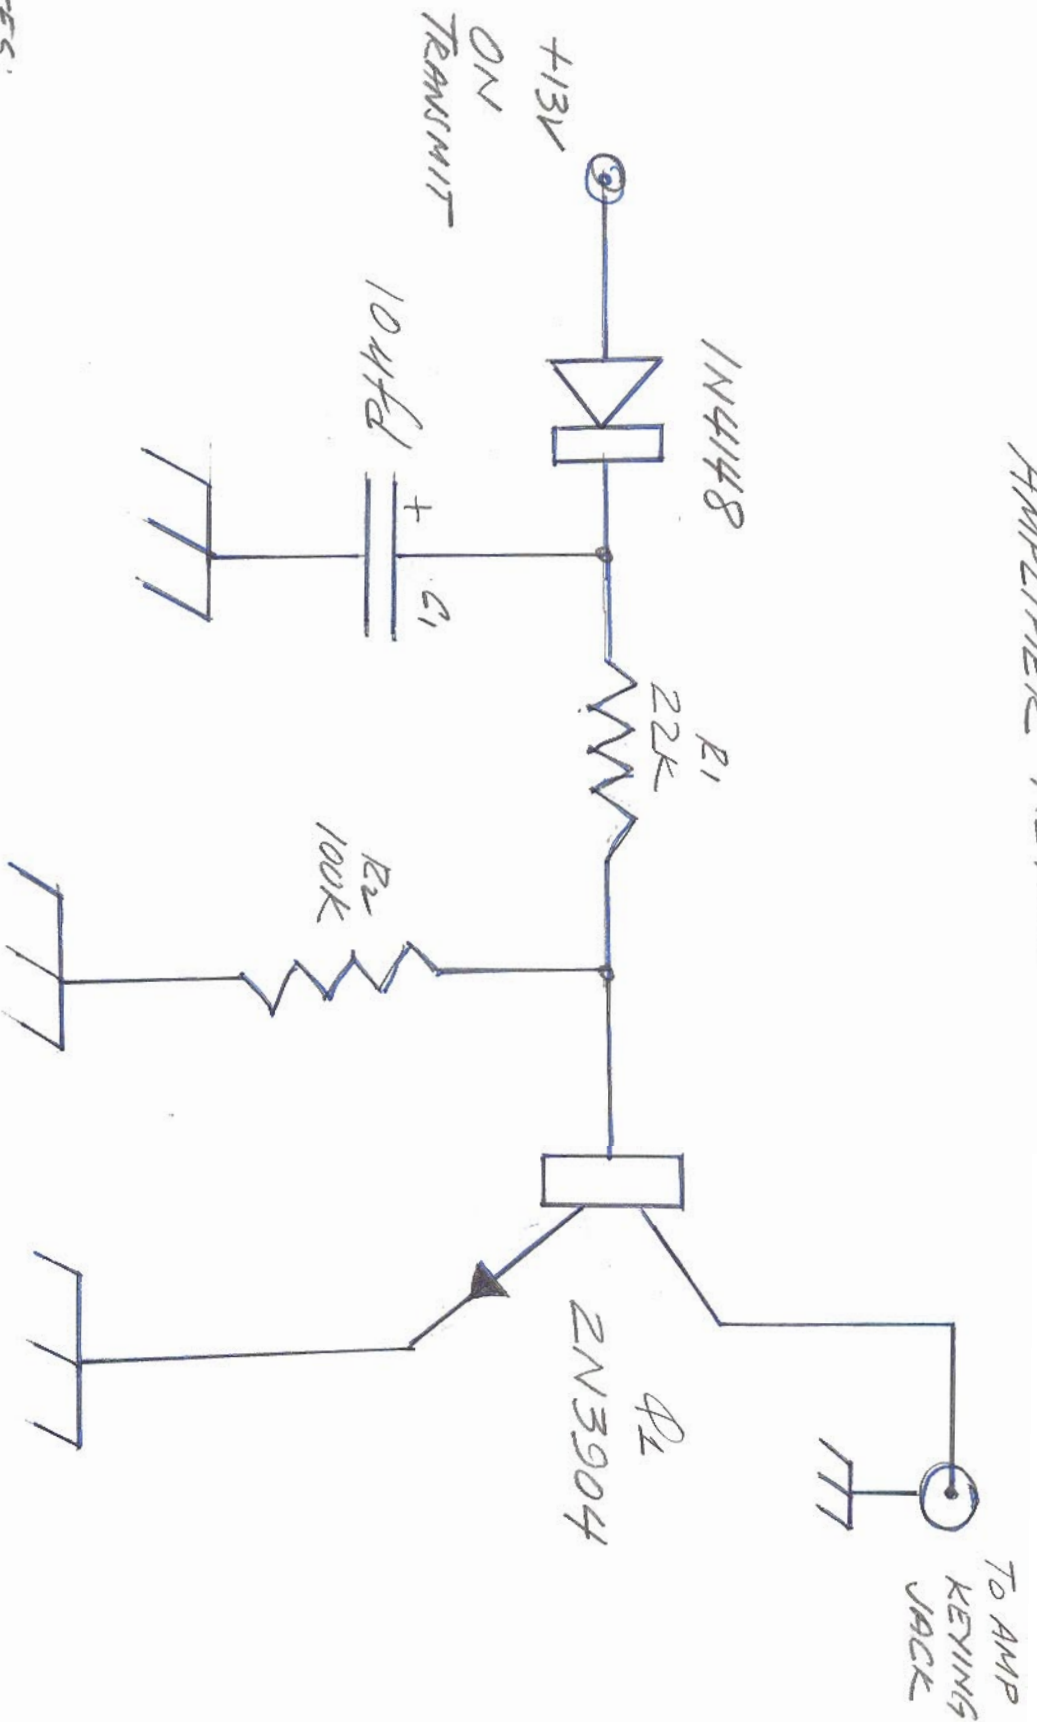

NOTES:

- (1) POWER DERIVED FROM AMP
- (2) C₁ ~ ADD MORE C FOR FOL
PLONGER DELAY CURRENTLY SET ~ 1µS.
- (3) THIS HAS BEEN LOCATED ON THE
POWER SEQUENCING CIRCUIT BOARD
- (4) BASIC OPERATION: +13V CHARGES THE CAPACITOR
C₁, THIS HAS THE EFFECT OF TURNING ON Q₁.
Q₁ REMAINS ON UNTIL NO MORE VOLTAGE APPLIED AND C₁ DRAINS THROUGH R₁ & R₂

W6JFR

2008